




# All-New Dacia Duster

Rugged, robust and better looking



# Dimensions

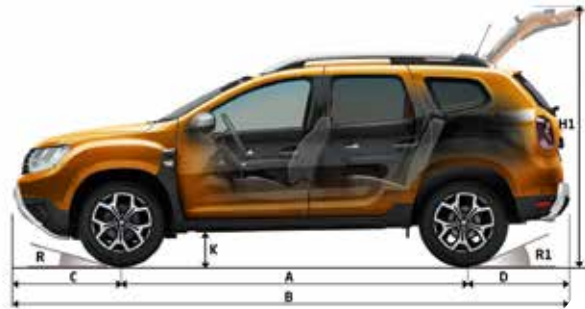

| Exterior dimensions (mm)   | SCe115 4x2    | SCe115 4x4    | TCe 130 4x2   | TCe 150 4x2   | Blue dCi 115 4x2 | Blue dCi 115 4x4 |
|--|---------------|---------------|---------------|---------------|------------------|------------------|
| A - Wheelbase  | 2674          | 2676          | 2674          | 2674          | 2674             | 2676             |
| B - Overall bodywork length  | 4341          | 4341          | 4341          | 4341          | 4341             | 4341             |
| C - Front overhang   | 842           | 841           | 842           | 842           | 842              | 841              |
| D - Rear overhang  | 826           | 824           | 826           | 826           | 826              | 824              |
| E - Front track  | 1,563         | 1,563         | 1,563         | 1,563         | 1,563            | 1,563            |
| F - Rear track   | 1570          | 1580          | 1570          | 1570          | 1570             | 1580             |
| G - Overall width with / without door mirrors                        | 1804 / 2052   | 1804 / 2052   | 1804 / 2052   | 1804 / 2052   | 1804 / 2052      | 1804 / 2052      |
| H - Unladen height / with roof bars                                  | 1633 / 1693   | 1621 / 1682   | 1633 / 1693   | 1633 / 1693   | 1633 / 1693      | 1621 / 1682      |
| K - Ground clearance (unladen)                                       | 210           | 210           | 210           | 210           | 210              | 210              |
| L - Rear knee room   | 170           | 170           | 170           | 170           | 170              | 170              |
| M - Front elbow room   | 1403          | 1403          | 1403          | 1403          | 1403             | 1403             |
| M1 - Rear elbow room   | 1416          | 1416          | 1416          | 1416          | 1416             | 1416             |
| N - Front shoulder width   | 1383          | 1383          | 1383          | 1383          | 1383             | 1383             |
| N1 - Rear shoulder width   | 1379          | 1379          | 1379          | 1379          | 1379             | 1379             |
| P1 - Distance between hip joint and ceiling in front seats           | 900           | 900           | 900           | 900           | 900              | 900              |
| P2 - Distance between hip joint and ceiling in rear seats            | 892           | 892           | 892           | 892           | 892              | 892              |
| Y - Interior width between wheel arches                              | 977           | 977           | 977           | 977           | 977              | 977              |
| Z1 - Loading length, rear seat in place                              | 990           | 990           | 990           | 990           | 990              | 990              |
| Z2 - Loading length with rear seats folded                           | 1792          | 1792          | 1792          | 1792          | 1792             | 1792             |
| Boot volume  | 4x2           | 4x4           | 4x2           | 4x4           | 4x2              | 4x4              |
| Under luggage space with repair kit / spare wheel (dm <sup>3</sup> ) | 445 / 445     | 411 / 376     | 445 / 445     | 445 / 445     | 445 / 445        | 411/376          |
| Maximum boot space with rear seats folded down (litres)              | 1,623 / 1,623 | 1,614 / 1,559 | 1,623 / 1,623 | 1,623 / 1,623 | 1,623/1623       | 1614/1559        |
| Clearance angles   | 4x2 & 4x4     |               | 4x2 & 4x4     |               | 4x2 & 4x4        |                  |
| 1 - Approach angle   | 30°           |               | 30°           |               | 30°              |                  |
| 2 - Ventral angle  | -             | 21°           | -             | 21°           | -                | 21°              |
| 3 - Departure angle  | 34°           | 33°           | 34°           | 33°           | 33°              | 33°              |

## The finer detail

|  |  | SCe 115 4x2  | SCe 115 4x4                  | TCe 130 4x2   | TCe 150 4x2   | Blue dCi 115 4x2  | Blue dCi 115 4x4             |
|--|--|--|------------------------------|---|---|---|------------------------------|
| <b>Engine</b>                          | Engine type  | H4Mk JR5   | H4Mk TL8                     | MFM TL4   | M3M TL4   | K9K 666   | K9K 658                      |
|  | Type Mine  | HSDCVE   | HSDCVG                       |   |   | HSDJ9F  | HSDJ9G                       |
|  | Cubic capacity (cm <sup>3</sup> )                        | 1,598  | 1,598                        | 1,333   | 1,333   | 1,461   | 1,461                        |
|  | Number of cylinders/valves                               | 4 in line / 16   | 4 in line / 16               | 4 in line / 16  | 4 in line / 16  | 4 in line / 8   | 4 in line / 8                |
|  | Fuel   | Unleaded petrol  | Unleaded petrol              | Unleaded petrol   | Unleaded petrol   | Diesel  | Diesel                       |
|  | Fuel injection type                                      | Multipoint sequential  |                              | Commonrail direct + multipoint injection                  |   | Commonrail direct + multipoint injection                  |                              |
|  | Aspiration   | Naturally-aspirated  | Naturally-aspirated          | Turbocharged  | Turbocharged  | Turbocharged  | Turbocharged                 |
|  | Particulate filter (PF)                                  |  |                              | -   | -   | Standard  | Standard                     |
|  | Bore x Stroke  | 78 x 83.6  | 78 x 83.6                    | 72.2 x 84.4   | 72.2 x 84.5   | 76 x 80.5   | 76 x 80.5                    |
|  | Compression ratio  | 10.7   | 10.7                         | 10.7  | 10.7  | 15.5  | 15.5                         |
|  | Peak power KW (Metric HP) @ RPM                          | 84 (115) @ 5,500   | 84 (115) @ 5,500             | 96 (130) @ 5000   | 110 (150) @ 5250  | 85 (115) @ 3,750  | 85 (115) @ 3,750             |
|  | Peak torque (Nm) @ RPM                                   | 156 @ 4,000  | 156 @ 4,000                  | 240 @ 1600  | 250 @ 1700  | 260 @ 2,000   | 260 @ 2,000                  |
|  | Stop and Start   | Yes  | Yes                          | Yes   | Yes   | Yes   | Yes                          |
|  | <b>Performance</b>                                       | Maximum Speed mph (km/h)                                       | 107 (172)                    | 105 (170)   | 118 (191)   | 124 (200)   | 111 (179)                    |
| 0- 62 mph - secs (0-100 km/h)          |  | 11.9   | 12.9                         | 11.1  | 10.4  | 10.5  | 12.1                         |
| 400 m stopping distance (secs)         |  | 18.3   | 19                           | 17.8  | 17.3  | 17.6  | 18.4                         |
| 1000 m Stopping distance (secs)        |  | 33.9   | 34.5                         | 32.1  | 31.0  | 32.4  | 33.8                         |
| <b>Fuel consumption* and emissions</b> | CO <sub>2</sub> (g/km)                                   | 149  | 158                          | 139   | 139   | 111   | 123                          |
|  | Combined cycle - l/100km                                 | 7.7 - 8.0  | 8.3 - 8.5                    | 6.8 - 7.2   | 6.8 - 7.2   | 4.9 - 5.5   | 5.8 - 5.8                    |
|  | Combined cycle - mpg                                     | 36.7 - 35.3  | 34.0 - 33.2                  | 41.5 - 39.2   | 41.5 - 39.2   | 57.6 - 51.3   | 48.7 - 48.7                  |
| <b>Gearbox</b>                         | Drive type   | Front-wheel drive  | All-wheel drive (selectable) | Front-wheel drive   | Front-wheel drive   | Front-wheel drive   | All-wheel drive (selectable) |
|  | Gearbox type   | Manual   | Manual                       | Manual  | Manual  | Manual  | Manual                       |
|  | Gearbox type*index                                       | JR5*395  | TL8*008                      | TL4*082   | TL4*082   | TL4*075   | TL8*005                      |
|  | Number of forward gears                                  | 5  | 6                            | 6   | 6   | 6   | 6                            |
| <b>Steering</b>                        | Steering type  | Electric Power Steering  |                              |   |   |   |                              |
|  | Turning circle between pavements / walls (m)             | 10.14  | 10.14                        | 10.14   | 10.14   | 10.14   | 10.14                        |
|  | Number of turns (lock-to-lock)                           | 3.3  | 3.3                          | 3.3   | 3.3   | 3.3   | 3.3                          |
| <b>Suspension</b>                      | Front suspension type                                    | MacPherson-type with rectangular lower arm and anti roller bar |                              |   |   |   |                              |
|  | Rear suspension type                                     | Flexible axle with programmed deflection and coil springs      | McPherson-type multi link    | Flexible axle with programmed deflection and coil springs | Flexible axle with programmed deflection and coil springs | Flexible axle with programmed deflection and coil springs | McPherson-type multi-link    |
| <b>Wheels/tyres</b>                    | Wheel size   | 6.5 J 16   | 6.5 J 16                     | 6.5 J 16  | 6.5 J 16  | 6.5 J 16  | 6.5 J 16                     |
|  | Tyre specification                                       | 215/65 R16 & 215/60 R17  | 215/65 R16 & 215/60 R17      | 215/65 R16 & 215/60 R17                                   | 215/65 R16 & 215/60 R17                                   | 215/65 R16 & 215/60 R17                                   | 215/65 R16 & 215/60 R17      |
| <b>Braking</b>                         | Front: Ventilated discs - diameter (mm) / thickness (mm) | 269 / 22.4   | 269 / 22.4                   | 280/24  | 280/24  | 280 / 24  | 280 / 24                     |
|  | Rear: Drum - diameter (inches)                           | 9  | 9                            | 9   | 9   | 9   | 9                            |
|  | Anti-lock Braking System (ABS)                           | Standard (Bosch 9.1)   | Standard (Bosch 9.1)         | Standard (Bosch 9.1)                                      | Standard (Bosch 9.1)                                      | Standard (Bosch 9.1)                                      | Standard (Bosch 9.1)         |
|  | Electronic Brakeforce Distribution (EBD)                 | Standard   | Standard                     | Standard  | Standard  | Standard  | Standard                     |
|  | Emergency Brake Assist (EBA)                             | Standard   | Standard                     | Standard  | Standard  | Standard  | Standard                     |
|  | ESC (Electronic Stability Control)                       | Standard   | Standard                     | Standard  | Standard  | Standard  | Standard                     |
| <b>Fuel tank capacity</b>              | Fuel tank capacity (litres)                              | 50   | 50                           | 50  | 50  | 50  | 50                           |
|  | AdBlue tank capacity (litres)                            | -  | -                            | -   | -   | 14.4  | 14.4                         |
| <b>Weight</b>                          | Kerb Weight (Excluding Driver) (kg)                      | 1,179  | 1,276                        | 1,234   | 1,234   | 1,320   | 1,405                        |
|  | Total authorised laden weight (kg)                       | 1,712  | 1,809                        | 1,762   | 1,762   | 1,848   | 1,875                        |
|  | Gross train weight (GTW)                                 | 2,812  | 3,309                        | 2,962   | 2,962   | 3,048   | 3,433                        |
|  | Max payload (kg)   | 533  | 533                          | 550   | 550   | 528   | 528                          |
| <b>Towing capacity</b>                 | Max (driver only) towing weight: braked (kg)             | 1,400  | 1,500                        | 1,500   | 1,500   | 1,500   | 1,500                        |
|  | Max (driver only) towing weight: unbraked (kg)           | 625  | 675                          | 650   | 650   | 695   | 695                          |
| <b>Ground clearance</b>                | Ground clearance (unladen) (mm)                          | 205  | 210                          | 205   | 205   | 205   | 210                          |
|  | Wading depth (mm)  | 350  | 350                          | 350   | 350   | 350   | 350                          |

\*WLTP figures shown are for comparability purposes; only compare figures with vehicles tested to the same technical procedures. Actual real world driving results may vary depending on factors such as weather conditions, driving styles, vehicle load or any accessories fitted after registration. WLTP is a new test used for fuel consumption and CO<sub>2</sub> figures however until April 2020 the CO<sub>2</sub> figures are based on the outgoing (NEDC) test cycle which will be used to calculate vehicle tax on first registration. Please visit [dacia.com.cy/configure](https://www.dacia.com.cy/configure) for WLTP figures for any selected options.



# Take your **first adventure**

Make a smart choice today.

Book a test drive at [Dacia.com.cy](https://www.dacia.com.cy)

Or give us a ring on **77 77 33 44**

**DACIA**

[www.dacia.com.cy](https://www.dacia.com.cy)

Every precaution has been taken to ensure this publication is accurate and up to date when printed. This document was created using pre-production and prototype models. As part of its ongoing product improvement policy, Char. Pilakoutas Auto Alliance Limited reserves the right to change the specifications, vehicles and accessories described and featured at any time. Dacia dealerships are notified of any such changes as quickly as possible. Please contact your Dacia representative for the latest information. For technical printing reasons, the colours featured in this document may differ slightly from those of the actual paintwork or interior trim. All rights reserved. It is forbidden to reproduce any part of this publication, in any form and by any means, without prior written authorisation from Dacia.

PHOTO CREDITS: © RENAULT MARKETING 3D - COMMERCE, © RENAULT DESIGN - B. CHIMÈNES ET ADDITIVE, P. CURTET, A. BERNIER - FEBRUARY 2019

